

# INTENSIFIER

## Hydraulic

Pressure ratio 5:1


HB443



10,000 psi

**CONVERTS LOW-PRESSURE PORTABLE HYDRAULIC PUMPS OR ON-BOARD HYDRAULIC SYSTEMS, INTO HIGH PRESSURE POWER SOURCES.**

- Applications include utilities, railroads, construction, riggers and others.
- Operates single- or double-acting cylinders, jacks, and tools such as crimpers, spreaders, cable cutters, or tire tools. Version for use with double-acting torque wrenches available.
- May be used to operate two separate, single-acting tools (with integral valves) independently, without need for additional manifold.
- Control valve included. Other Power Team valves available as an option to suit your specific application, if needed; consult factory.
- Compact and rugged for use inside a utility vehicle aerial bucket or stowing in a vehicle.
- No reservoir level to maintain; uses low pressure system as oil supply.
- Has  $\frac{3}{8}$ " NPTF ports; compatible with standard fittings for low and high pressure systems.

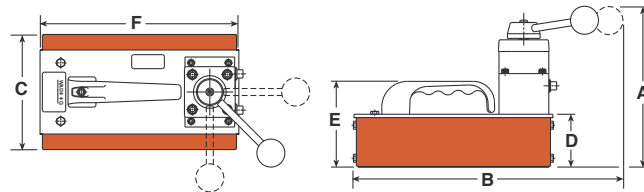

Pump No.	Output Flow @ 10,000 (psi)	A (in.)	B (in.)	C (in.)	D (in.)	E (in.)	F (in.)	Prod. Wt. (lbs.)
<b>HB44 Series</b>	44 cu. in./min.	8 <sup>5</sup> / <sub>8</sub>	14 <sup>1</sup> / <sub>2</sub>	6 <sup>1</sup> / <sub>8</sub>	2 <sup>3</sup> / <sub>4</sub>	4 <sup>1</sup> / <sub>2</sub>	10 <sup>1</sup> / <sub>2</sub>	16

For use with Cyl. Type	Description	Order No.	Valve Type	Valve No.	Output Flow Valve Function	Input Flow Range (gpm)	Input Flow Pressure (psi)	Output Flow Range (gpm)
Single-Acting	Hydraulic intensifier for single-acting systems	<b>HB443</b>	3-Way 3-Position	9520*	Advance Hold Return	0 -10	300 - 2,000	0 - 2.5
Single-Acting/ Double-Acting	Hydraulic intensifier for double-acting systems	<b>HB444</b>	4-Way 3-Position	9506*	Advance Hold Return	0 -10	300 - 2,000	0 - 2.5
Double-Acting	Hydraulic intensifier for double-acting torque wrench tools	<b>HB445-RR</b>	4-Way 3-Position	-	Advance Hold Return	0 -10	300 - 2,000	0 - 2.5

† For maximum efficiency, recommended input flow is 5 gpm at a maximum pressure of 2,000 psi. Higher flows and/or pressures must be compensated for at the system pump (e.g., relief valve, variable flow devices, etc.).

\* "Posi-Check®" valve design, "Posi-Check®" guards against pressure loss when valve is shifted from "advance" position to "hold" position.