

MAXIMATOR®

Maximum Pressure.




High Pressure Technology • Testing Equipment
Hydraulics • Pneumatics

Technical Data Sheet

GSF10 (L)

» Special liquids

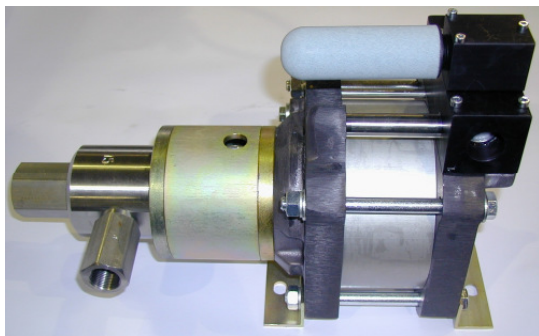

GSF10 (L)
single acting, single air drive head with distance piece
(Standard= Bottom inlet)

Technical Data:

Air drive pressure:	1-10 bar / 14,5 - 145psi
Calculated Outlet Pressure at an air drive of 10 bar/145 psi:	110 bar/ 1,595 psi
Pressure ratio:	1:11
Displacement volume/double stroke	90.0cm³/ 5.49 cu.inch

Connections:

Inlet:	Standard: Bottom Inlet 1 BSP
Outlet:	3/4 BSP
Air drive:	3/4 BSP
Maximum operating temperature:	60°C
Net weight:	20.0 kg

Pressure and flow performances, please see enclosed graph.

Wetted materials of construction:

Seal package:	GSF10(L): Polyurethan, NBR GSF10(L)VE: UHMWPE, FKM
Pump Body:	1.4305
Piston:	1.4112 (hardened)
Fittings:	1.4571

Approximate Dimensions:

Height:	411 mm
Depth:	190.5 mm
Width:	272 mm

Available Options:

Side inlet	GSF10(L)S
Special inlet and outlet ports, i.e. NPT	GSF10(L)-NPT
Special seal material to handle special fluids on request.	

Available Accessories:


Air control units with filter pressure regulator, control pressure gauge and shut off valve:	GSF10(L) with C2
To protect the pump against excessive outlet pressures or to limit the outlet pressure, a safety valve can be fitted to the air control unit in the air drive line:	GSF10(L) with C2/SVair (The required outlet pressure has to be indicated.)

Please consult factory for more information. All technical and dimensional information subject to change. All General Terms and Conditions of sale, including limitations of our liability, apply to all products and services sold.

MAXIMATOR®

Maximum Pressure.

High Pressure Technology • Testing Equipment
 Hydraulics • Pneumatics

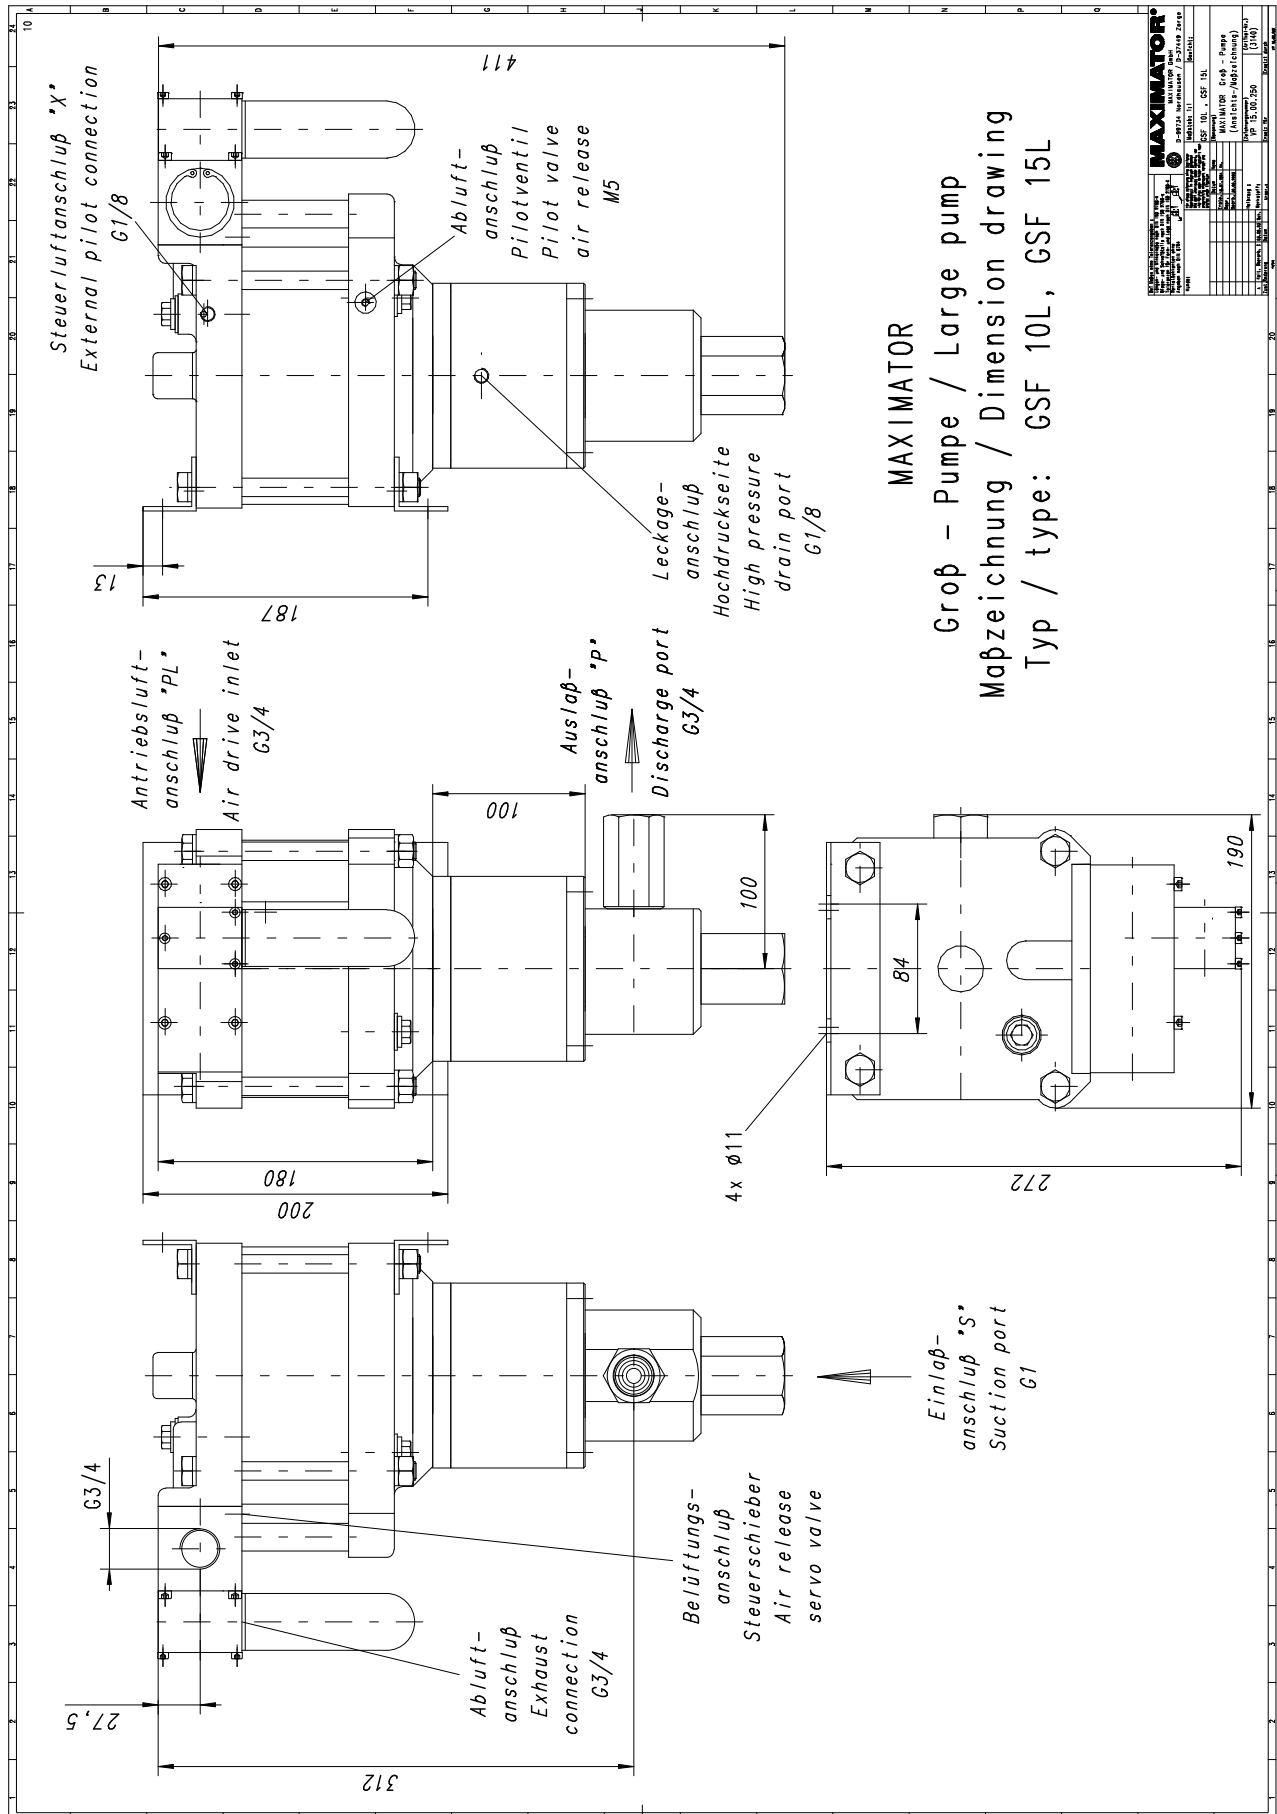

MAXIMATOR
 Groß – Pumpe / Large pump
 Maßzeichnung / Dimension drawing
 Typ / type: GSF 10L, GSF 15L

MAXIMATOR	
Pneumatische Testtechnik	
Pneumatic Test Technology	
Hochdruck-Technik	
High Pressure Technology	
Eigenschaften / Characteristics	
Druckbereich / Pressure range	10 - 350 bar
Fließrate / Flow rate	10 - 100 l/min
Technische Zeichnung / Technical drawing	
Date: 01.10.2012	
Zeichner / Drafter: ...	
Geprüft / Checked: ...	
Freigegeben / Released: ...	

Leistungsdiagramm/Performance Graph G(SF) 10

Prüfflüssigkeit/Test Liquid: Wasser-Öl-Emulsion/Water Oil Emulsion ca. 1 - 10 cst

